


Kolíky izolované


Použitý materiál: kolík - měď galvanicky pocínovaná
 izolace - Polyvinylchlorid (PVC)
 -10° C až +75° C



Průřez (mm ²)	Objednací kód	Rozměry (mm)				Balení (ks)
		l1	l2	d	b	
0,5-1,5 červená	KI 1,5-8	8,0	17,8	3,9	1,8	100
	KI 1,5-10	10,0	19,8	3,9	1,8	100
	KI 1,5-12	12,0	22,0	3,9	1,8	100
1,5-2,5 modrá	KI 2,5-8	8,0	18,3	4,9	1,8	100
	KI 2,5-10	10,0	19,8	4,9	1,8	100
	KI 2,5-12	12,0	22,0	4,9	1,8	100
4-6 žlutá	KI 6-10	10,0	24,4	6,7	2,2	100
	KI 6-12	12,0	26,6	6,7	2,2	100
	KI 6-14	14,0	28,6	6,7	2,2	100
10	KI 10-12	14,5	35,1	8,0	4,2	100
16	KI 16-14	18,0	41,1	9,2	5,5	100
25	KI 25-16	20,3	45,0	11,1	6,8	100
35	KI 35-20	24,5	55,0	13,6	8,0	100
50	KI 50-26	26,0	59,0	15,5	9,5	100
70	KI 70-31	31,0	69,0	18,0	11,0	50
95	KI 95-31	31,0	71,0	20,7	12,5	50

Kolíky neizolované


Použitý materiál: měď galvanicky pocínovaná
 Vyrobeno dle normy: DIN 46230

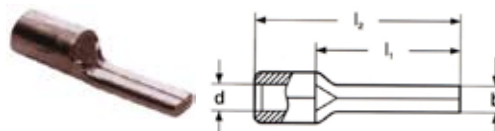

Průřez (mm ²)	Objednací kód	Rozměry (mm)				Balení (ks)
		l1	l2	d	b	
0,1-0,5	KN 0,5-10	10,0	14,0	1,0	1,4	100
0,5-1,5	KN 1,5-12	12,0	15,0	1,6	1,9	100
1,5-2,5	KN 2,5-12	12,0	15,0	2,3	1,9	100
4-6	KN 6-14	14,0	20,0	3,6	2,7	100
10	KN 10	14,5	23,5	4,8	4,3	100
16	KN 16	18,0	28,0	5,9	5,5	100
25	KN 25	20,3	32,0	7,0	7,0	100
35	KN 35	24,5	39,0	8,9	8,0	100
50	KN 50	26,0	45,0	10,0	9,5	100
70	KN 70	31,0	55,0	11,5	11,0	50
95	KN 95	31,0	55,0	13,5	12,5	50

Kolíky izolované ploché

Použitý materiál: kolík - měď galvanicky pocínovaná
izolace - Polyvinylchlorid (PVC)
-10°C až +75°C



Průřez (mm ²)	Objednací kód	Rozměry (mm)				Balení (ks)
		l1	l2	d	b	
0,5-1,5	KIPL 1,5-12	10,0	20,0	4,3	2,3	100
	KIPL 1,5-18	18,0	28,0	4,3	2,5	100
1,5-2,5	KIPL 2,5-12	10,0	20,0	4,8	2,5	100
	KIPL 2,5-18	18,0	28,0	4,8	2,5	100
4-6	KIPL 6-12	10,0	23,5	6,5	3,0	100
	KIPL 6-16	16,0	29,5	6,5	4,8	100

Abtech

Anamet

Bimed

Reiku

Technik